

# BOLLARDS SPECIFICATION SHEET



**COLLINGWOOD  
LIGHTING**

01604 495 151  
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

## BL01

Low voltage Iroko wood

### FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Input	350mA / 700mA
LED Lifetime	70,000h L70 B10
SDCM	3SDCM

### INSTALLATION INFORMATION

Bathroom zone	1
Construction Material	Iroko wood
Weight	5800g
Maximum ambient temperature	35°C
Electric Class (1, 2, 3)	3

### PHOTOMETRICS @ 25°C

Product code	Feature I	Feature II	Feature III	Wattage	Colour	Beam angle	350mA			700mA		
							lm	lm/W	lx @ 1m	lm	lm/W	lx @ 1m
BL01PIB27	Single LED	Pointed	Base cable entry	1W (350mA) 2W (700mA)	2700K	26°	70	70	204	120	60	337

### WIRING INFORMATION

Cable / Flying Lead	1.8m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

### LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	N/A	N/A	N/A	N/A	1	9
PLR/350 1-5	N/A	N/A	N/A	N/A	1	5
PLU/700 3-9	N/A	N/A	N/A	N/A	3	9

### ACCESSORIES

BOL LED BRACKET
JB2 / JB4 / JB6
WCR 275 BLACK

### GUARANTEE / WARRANTY

7 year extended warranty

### FEATURES & BENEFITS

Choice of wood finishes: Iroko, Sapele or Oak

Pointed, Chamfered or Domed top

Choice of low-voltage or straight-to-mains

Side-entry cable or base-entry cable options


Three colour temperature options: 2700K, 3000K or 4000K

7-year warranty


Light source energy efficiency:



### Beam angle:

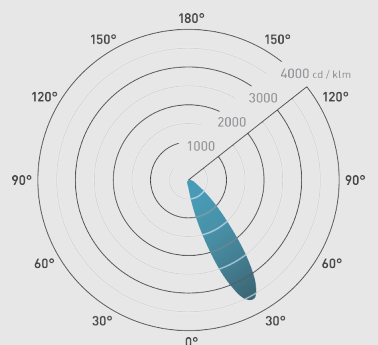

### Recessed mount



### Surface mount

