

# BOLLARDS SPECIFICATION SHEET



## BL03

Straight to mains Iroko wood

### FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

### INSTALLATION INFORMATION

Bathroom zone	-
Inrush Current	17.9A 0.1ms
Construction Material	Iroko wood
Weight	5500g
Maximum ambient temperature	35°C
SELV	N/A (Integrated SELV driver)
Electric Class [1, 2, 3]	2

### PHOTOMETRICS @ 25°C

Product code	Feature I	Feature II	Feature III	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
BL03DIB30	Triple LED	Domed	Base cable entry	5W	3000K	110°	160	32	80

### WIRING INFORMATION

Cable / Flying Lead	NEW 1.5mm SY 2 Core PVC Steel Braid Cable
Type of Wiring Required	Parallel

### LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	N/A	N/A	N/A	N/A	N/A	N/A


### ACCESSORIES


BOL LED BRACKET
JB5




**COLLINGWOOD**  
LIGHTING

01604 495 151  
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

### GUARANTEE / WARRANTY

7 year extended warranty

### FEATURES & BENEFITS

Choice of wood finishes: Iroko, Sapele or Oak

Pointed, Chamfered or Domed top

Choice of low-voltage or straight-to-mains

Side-entry cable or base-entry cable options


Three colour temperature options: 2700K, 3000K or 4000K

7 year warranty


Light source energy efficiency:



### Beam angle:

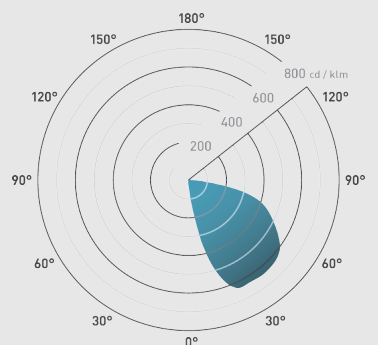

### Recessed mount



### Surface mount

