



# BOLLARDS SPECIFICATION SHEET




**COLLINGWOOD  
LIGHTING**

01604 495 151  
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

## BOL200 Midi Bollard

Straight to mains, IP65, 930lm bollard

### FEATURES

IK rating	IK04
IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	30,000h L70 B10
CRI	>80Ra
SDCM	<5

### INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	20A 0.5ms
Construction Material	Aluminium/PVC
Weight	2.6Kg
Maximum ambient temperature	40°C
Electric Class (1, 2, 3)	1

### PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
BOL200X30	Black RAL9011	23W	3000K	360°	930	40	108

### WIRING INFORMATION

Cable Required for Connector	3x 1.0mm <sup>2</sup>
Type of Wiring Required	Parallel

### LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (Integrated SLEV driver)	220-240V	Yes	No	-	N/A	N/A

### ACCESSORIES

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold separately
-----	--	-----------------

### GUARANTEE / WARRANTY

5 year extended warranty

### FEATURES & BENEFITS

Black powder coated finish

Straight to mains screw terminals


Frosted window effect at the top

Perfect for any outdoor condition with an IP65 rating

Low glare 360° illumination, ideal for pathways, boundary marking, or general illumination of exterior spaces

High intensity of light with 930 lumens

### Beam angle: 360°

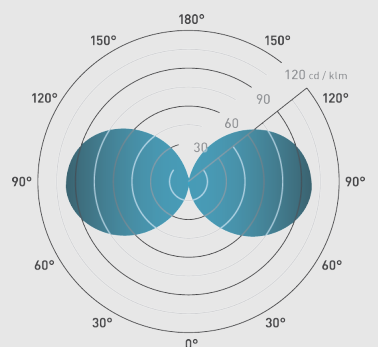

Ø145mm

