



BOLLARDS SPECIFICATION SHEET




COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

BOL300 Midi Bollard

Straight to mains, IP65, 500lm bollard

FEATURES

IK rating	IK08
IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	30,000h L70 B10
CRI	>80Ra
SDCM	<5

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	20A
Construction Material	Aluminium/PVC
Weight	2.9Kg
Maximum ambient temperature	40°C
Electric Class [1, 2, 3]	1

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
BOL300X30	Black RAL9011	23W	3000K	360°	500	22	144

WIRING INFORMATION

Cable Required for Connector	3x 1.0mm ²
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (Integrated SLEV driver)	220-240V	Yes	No	-	N/A	N/A

ACCESSORIES

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold separately
-----	--	-----------------

FEATURES & BENEFITS

Black powder coated finish

Straight to mains screw terminals


Domed top for a low glare finish, and a minimum up spill of light making it comfortable on the eye

Perfect for any outdoor condition with an IP65 rating

Benefiting from light all round with a 360° beam angle

IK08 rated

Beam angle: 360°

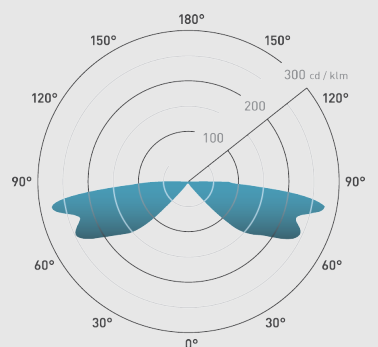

Ø150mm

