



BOLLARDS SPECIFICATION SHEET




**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

BOL301 Bollard

Straight to mains, IP65, 500lm bollard

FEATURES

IK rating	IK08
IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	30,000h L70 B10
CRI	>80Ra
SDCM	<5

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	20A
Construction Material	Aluminium/PVC
Weight	4.6Kg
Maximum ambient temperature	40°C
Electric Class [1, 2, 3]	1

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
BOL301X30	Black RAL9011	23W	3000K	360°	500	22	144

WIRING INFORMATION

Cable Required for Connector	3x 1.0mm ²
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (Integrated SLEV driver)	220-240V	Yes	No	-	N/A	N/A

ACCESSORIES

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold separately
-----	--	-----------------

GUARANTEE / WARRANTY

5 year extended warranty

FEATURES & BENEFITS

Black powder coated finish

Straight to mains screw terminals

Domed top for a low glare finish, and a minimum up spill of light making it comfortable on the eye

Comes complete with root mounting kit


Perfect for any outdoor condition with an IP65 rating

Benefiting from light all round with a 360° beam angle

Ideal for commercial use such as car parks and walk ways

IK08 rated

Beam angle: 360°

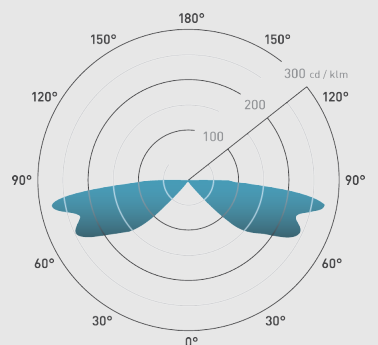

Ø150mm

