

# BULKHEADS SPECIFICATION SHEET



**COLLINGWOOD  
LIGHTING**

01604 495 151  
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

## WL95

IP65 10-15W Wattage and Colour Switchable Bulkhead, White Housing

### FEATURES

IK rating	IK10
IP rating	IP65
Colour flexibility	Colour switchable
Sensor	Microwave
Dimmable	No
Input	220-240V 50/60Hz
LED Lifetime	35,000h L70 B50
CRI	>80Ra
SDCM	6
Flicker Free	Yes
Emergency version available	Yes

### INSTALLATION INFORMATION

Install Connector Type	4 ways, push-fit
Bathroom zone	2
Inrush Current	10A 50µs
Construction Material	ABS Housing PC Diffuser
Weight	850g
Maximum ambient temperature	-20° to 40°C
Electric Class (1, 2, 3)	2

### GUARANTEE / WARRANTY

3 year extended warranty

### FEATURES & BENEFITS

Wattage switchable - 10W & 15W

Colour switchable - 3000K, 4000K & 6500K, via a switch under the back cover

Slimline design

Multiple mounting options: BESA box, M20 conduit, cable glands

IP65 rated, making it perfect for using outdoors

Up to 120lm/W efficacy offers low running costs

Emergency versions available. Lumen output in EM mode = 120lm

Multiple black bezel options available

Easy access push fit screwless terminals


### PHOTOMETRICS @ 25°C

Product code	Finish	Feature I	Wattage	Colour	Beam angle	lm	lm/W	EM lm
WL9515SCS	White	Standard	10-15W	3000K	115°	1100-1650	110-110	
WL9515SCS	White	Standard	10-15W	4000K	115°	1200-1800	120-120	
WL9515SCS	White	Standard	10-15W	6500K	115°	1200-1800	120-120	
WL9515MCS	White	Microwave Sensor	10-15W	3000K	115°	1100-1650	110-110	
WL9515MCS	White	Microwave Sensor	10-15W	4000K	115°	1200-1800	120-120	
WL9515MCS	White	Microwave Sensor	10-15W	6500K	115°	1200-1800	120-120	
WL9515ECS	White	Emergency	10-15W	3000K	115°	1100-1650	110-110	120lm
WL9515ECS	White	Emergency	10-15W	4000K	115°	1200-1800	120-120	120lm
WL9515ECS	White	Emergency	10-15W	6500K	115°	1200-1800	120-120	120lm
WL9515CCS	White	Microwave and Emergency	10-15W	3000K	115°	1100-1650	110-110	120lm
WL9515CCS	White	Microwave and Emergency	10-15W	4000K	115°	1200-1800	120-120	120lm
WL9515CCS	White	Microwave and Emergency	10-15W	6500K	115°	1200-1800	120-120	120lm

Light source energy efficiency:



Beam angle: 115°

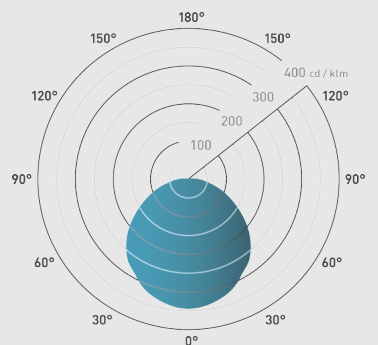

### WIRING INFORMATION

Cable / Flying Lead	Push-fit terminals, 1.5mm <sup>2</sup> max, loop-in/loop-out.
Type of Wiring Required	Parallel

### ACCESSORIES

WL95BEW	White Eyelid Accessory	Sold Separately
---------	------------------------	-----------------

