

GROUND LIGHTS SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

- @collingwoodLED
- /collingwoodlighting
- collingwoodled

GL008RGBW

Twin drive over, colour change LED ground light (25W max.)

FEATURES

IP rating	IP67
IK rating	IK10
Colour flexibility	RGBW
Tilttable	20°
Walk Over / Drive Over	Drive over (15mph maximum)
Input	350mA
LED Lifetime	50,000h L50 B50

INSTALLATION INFORMATION

Bathroom zone	1
Construction Material	Stainless steel 304 (cover ring only) / aluminium (body)
Weight	4.1Kg
Maximum ambient temperature	35°C
Electric Class (1, 2, 3)	3

GUARANTEE / WARRANTY

3 year extended warranty

FEATURES & BENEFITS

- Adjustable LED fitting to $\pm 20^\circ$
- Installation tube included
- 10mm toughened glass, ideal for use in driveways
- Full RGBW colour range
- Separate white LED for permanent use
- Compatible with a large range of controllers

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
GL008RGBW	6.6	White	25°	360	55	1701
GL008RGBW	4.8	Red	25°	261	54	715
GL008RGBW	6.6	Green	25°	416	63	1280
GL008RGBW	6.6	Blue	25°	68	10	285


LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PR3011	220-240V	-	Yes	1	1	1


ACCESSORIES

Installation tube included	
JB7	5-pole IP68 inline connector
CR575RGBW	5-core PVC cable

Beam angle: 25°

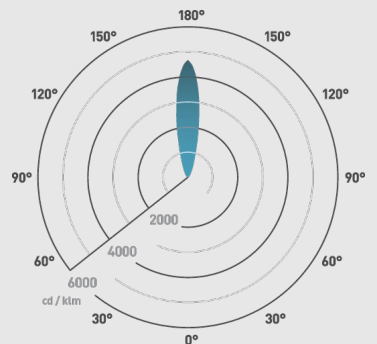

Ø225/212mm



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

A+
A
A
C
D
E

LED

874/2012