

BOLLARDS SPECIFICATION SHEET



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

- @collingwoodLED
- /collingwoodlighting
- collingwoodled

BOL256

985mm straight to mains anodised aluminium LED bollard

FEATURES

IP rating	IP65
IK rating	IK10
Colour flexibility	Fixed colour
Input	Mains AC
LED Lifetime	70,000h L70 B50
CRI	>85Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Inrush Current	38.8A 0.002ms
Construction Material	Anodised aluminium / polycarbonate
Weight	10000g
Maximum ambient temperature	40°C
SELV	Yes
Building regulations	Part P
Electric Class (1, 2, 3)	1

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

low glare 360° illumination, ideal for pathways, boundary marking, or general illumination of exterior spaces

Modular design for simple installation

Root-mount or surface-mount

Surface-mount bracket and fixtures are included

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
BOL256WW	16.5W	3000K	55°	750	45	53

WIRING INFORMATION

Cable / Flying Lead	1.5m H05RN-F 3G 0.75mm ² 7mm outside
Type of Wiring Required	Parallel


LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	N/A	N/A	No	N/A	N/A	N/A

ACCESSORIES

BOL255RM	Root mounting kit	Sold separately
JB5	Gel filled junction box	Sold separately

Beam angle: 55°

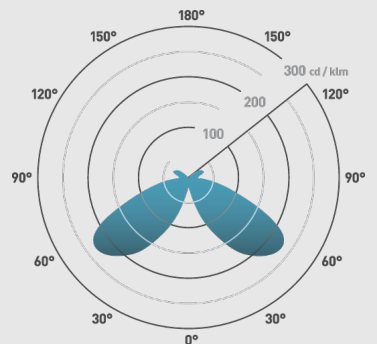

185mm



150mm

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

A+
A
A
C
D
E

LED

874/2012