



KPNL30ECO

30w LED ECO Panel, 600mmX600mm, 40000hrs



Product Overview

The Kosnic LED panel offers Edge-Lit technology to achieve constant light across the surface of the luminaire and is an easy-to-retrofit replacement for in-lay ceiling tile fittings. The standard panels are suitable for amenity lighting of corridors, stairwells, store rooms, transit areas and other utility spaces.

Features

Class III panel supplied with separate independent class II LED driver

Save up to 50% energy usage compared to traditional fluorescent fittings

Compatible with the CEW030LIL58-130N emergency module

Optional surface mounting kit available

High lumen output

Long life of 40,000h

Unit D2 Kennetside, Bone Lane
NEWBURY, BERKSHIRE

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>

Slim profile design

Instant start

Negligible UV output

Mercury free

Unit D2 Kennetside, Bone Lane
NEWBURY, BERKSHIRE

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>

Specifications

Shape / Type	Panel
Colour Finish	White Frame
Wattage (w)	30
Total Lumens (lm)	2900
Input Current (mA)	142
Input Voltage	220-240Vac
CCT Temperature (k)	4000
CCT Name	Cool White
Rated Life (hrs)	40000
Switch Cycles	50000
Peak Candelas (cd)	1050
Beam Angle (°)	120
CRI	81
Dimmable?	Not as standard
Retrofit?	Yes
Power Factor	0.92
Class Protection	Class III
Start Time (s)	0.49
Warm-up Time (s)	Instant full light
Length (mm)	595
Width (mm)	595
Depth (mm)	8.5
Ambient Temperature (°C)	-20 to 40
Emergency?	Option



Unit D2 Kennetside, Bone Lane
NEWBURY, BERKSHIRE

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>

Energy Label

Energy Class

A or above

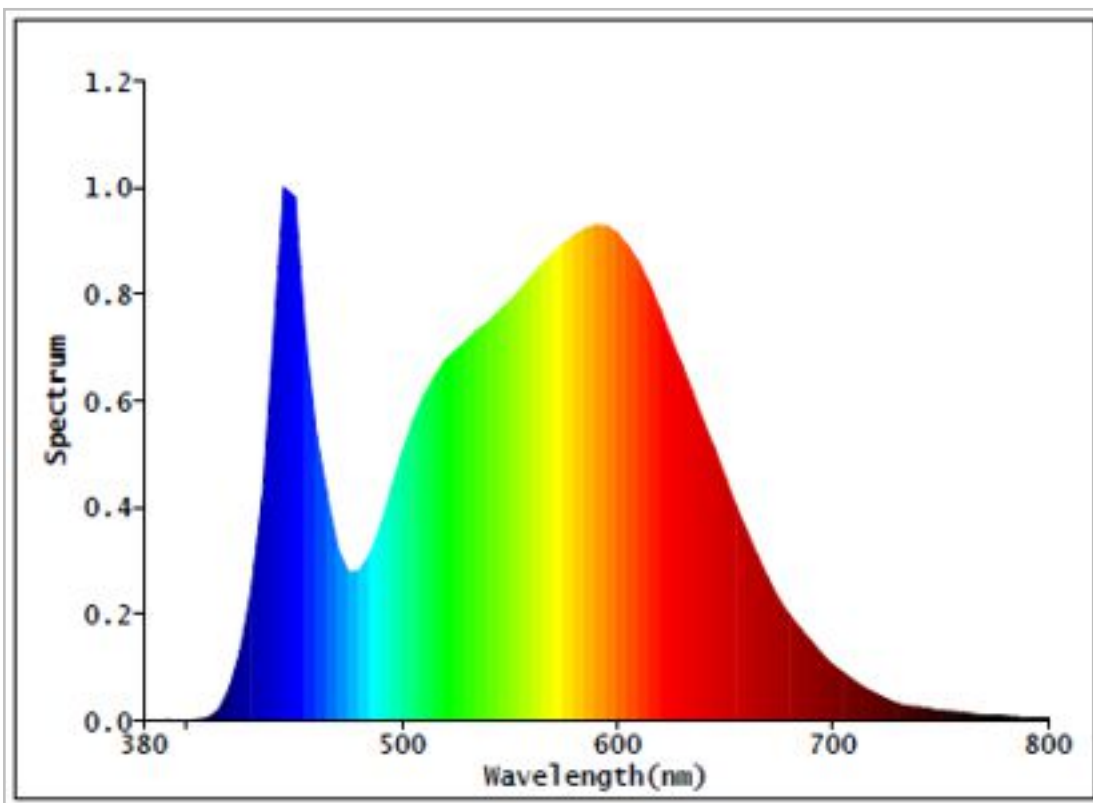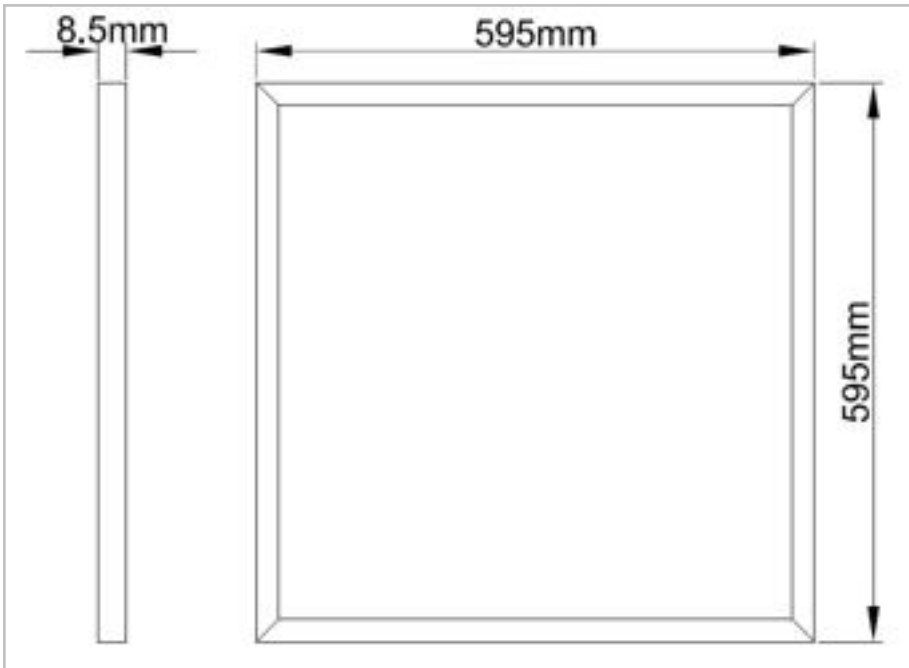

Datasheet generated from <http://www.electrika.com> on Sunday, May 7, 2017 2:55:24 PM

Unit D2 Kennetside, Bone Lane
NEWBURY, BERKSHIRE

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>